






# 301877

## INSTALLATION INSTRUCTION FOR LEFT SIDE

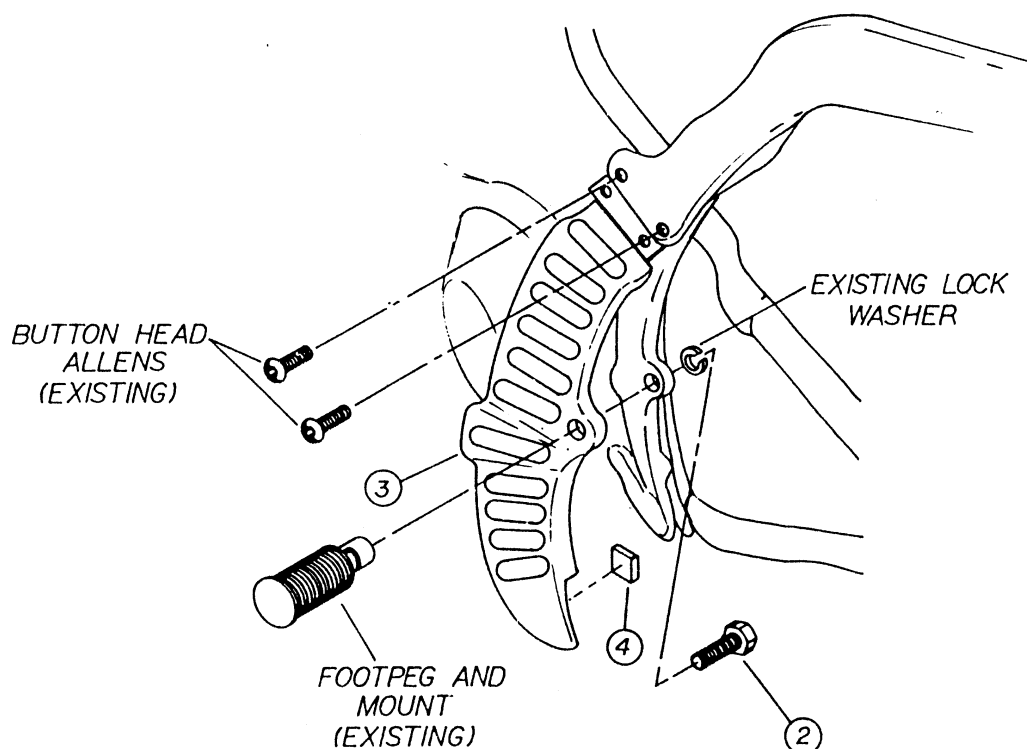

1. Remove the two buttonhead screws from the fender strut.
2. Remove the footpeg and mounting bolt from the frame tab.
3. Remove the adhesive cover from one side of the foam bumper (4) and stick the bumper inside the frame cover (3) as shown. Remove the other adhesive cover.
4. Slide the frame cover up under the fender strut and over the swingarm pivot bolt.
5. Start the two buttonhead screws loosely into the frame.
6. Loosely install the footpeg using the existing lock washer and supplied 1/2" bolt (2). Do not spin the footpeg as this could damage the cover chrome.
7. Tighten the buttonhead screws and footpeg mount.
8. Push the bottom of the cover firmly against the frame to seat the adhesive.